










# LOOK

DOMESTIC & COMMERCIAL  
GARAGE & ENTRANCE DOORS

## 95MM INDUSTRIAL ROLLER DOORS






# LOOK

DOMESTIC & COMMERCIAL  
GARAGE & ENTRANCE DOORS

- Designed specifically for industrial use
- Very strong yet light at just 11.3kg per sq mtr
- Laminated anti-scratch coating for extended life span
- Also suitable for large domestic applications

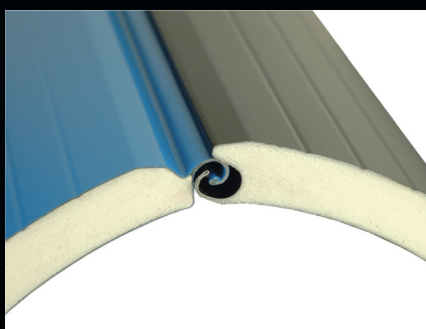


- Curved inner and outer surfaces to promote strength
- Excellent wind resistance
- Full polyurethane foam-filled cavity insulation for superior thermal properties
- Good acoustic dampening
- Top and bottom hooks are formed to allow a solid connection and quiet operation
- Structural grade galvanised coated steel ensuring a long life span
- Compact roll-up diameter




**LOOK**  
DOMESTIC & COMMERCIAL  
GARAGE & ENTRANCE DOORS


- Laminated coating provides superior anti-scratch resistance compared to painted surfaces
- Wide variety of colours available for immediate manufacture
- Textured finish for added durability




01.



02.




03.



04.




05.




06.



07.




08.



09.

- 01. BLACK
- 02. BLUE
- 03. MID-GREY
- 04. SILVER
- 05. WHITE
- 06. BROWN
- 07. RED
- 08. GREEN
- 09. LIGHT-GREY


## GUIDES & BOTTOM RAIL

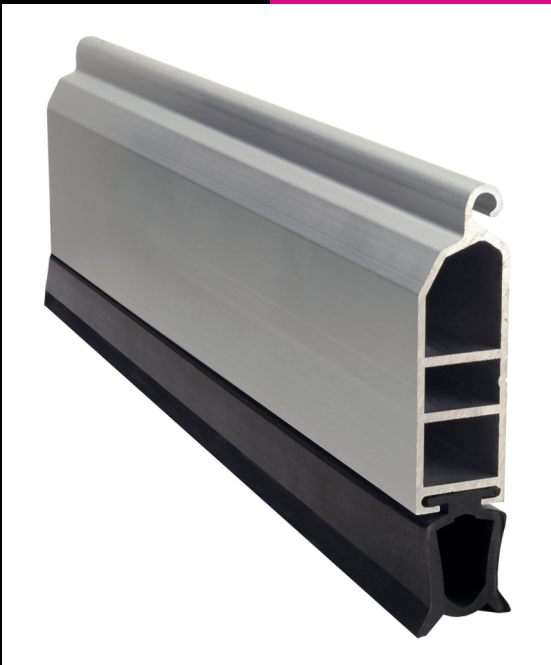

- Heavy duty extruded aluminium bottom rail
- Special air cushion rubber strip ensures solid seal from door to floor
- Solid design provides increased level of security



- 80 x 90mm roll formed guide rail
- Manufactured from 2.5mm galvanised steel
- Unique pre-punched guide rail offers easy fitting
- Slotted holes allow for adjustment during installation
- Snap-on brush carrier reduces heat loss and ensures quiet operation

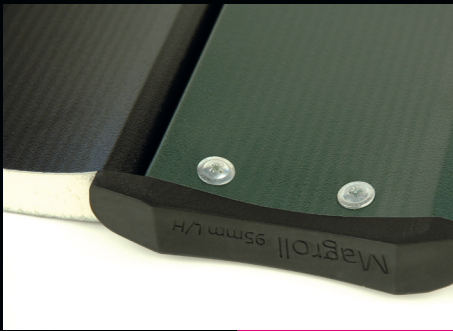

- Unique Top Hanger [Barrel Lath] suitable for 127 or 139mm barrel [5" or 5.5" (inches)]
- Recessed hanger design conceals 10mm nut and bolt fixing
- Hanger profile protects lath during operation
- Easy fix tap in end locks
- End locks held in position by screw or rivets
- The outer lath surface incorporates 3 grooves for increased strength and visually pleasing external surface
- Fully assembled door offers improved level of strength and security
- Tested to category 5 wind loading
- Thermally tested assembled curtain to 3.3 W/m<sup>2</sup>K
- All doors individually matched to customer specific requirements for colour and size
- A complimentary range of accessories are also available on request

**SALES@LOOKDOORS.CO.UK**  
**f LOOKGARAGEDOORS**

Leeming Lane, Mansfield Woodhouse, Notts. NG19 9AA

Suppliers & installers of

